

## TEATE 1

### FARETTO FISSO con 1 LED da 1 W

Corpo in alluminio.

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

#### Installazione

Tramite cassaforma.

#### SPOTLIGHT with 1 LED 1 W

Alluminium cover.

Supply current: 350 mA constant.



Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

#### Installation

By recessed connection box.

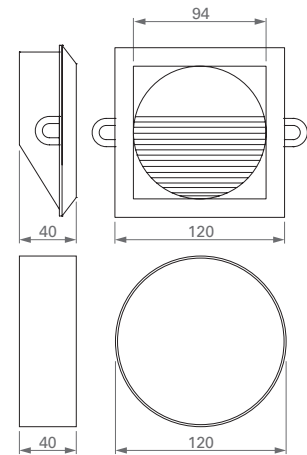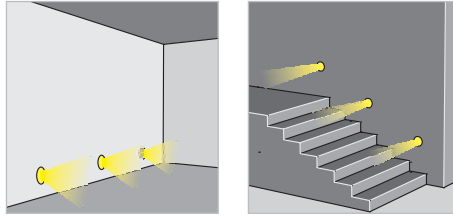

DIMENSIONI / DIMENSIONS

BI GR FINITURA / FINISHING  
00 10 20 30 40 50 COLORE LED / LED COLOUR  
FOCALE / BEAM SPREAD

472-01-   00

CODICE / CODE



CE IP54

## TEATE 2

### FARETTO FISSO con 1 LED da 3 W

Corpo in alluminio.

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 3,2 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

#### Installazione

Tramite cassaforma.

#### SPOTLIGHT with 1 LED 3 W

Alluminium cover.

Supply current: 700 mA constant.



Serial connection.

Consumption: 3.2 W.

Led power supply: code TRDC/700mA (pg. 187).

#### Installation

By recessed connection box.

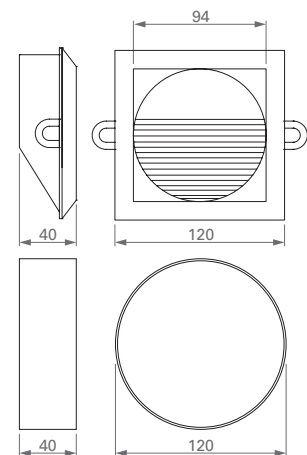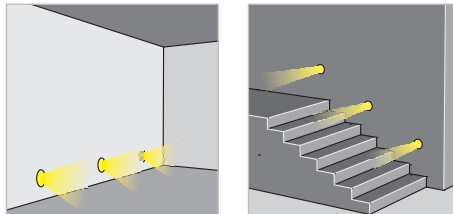

DIMENSIONI / DIMENSIONS

BI GR FINITURA / FINISHING  
00 10 20 30 40 50 COLORE LED / LED COLOUR  
FOCALE / BEAM SPREAD

472-02-   00

CODICE / CODE



CE IP54