

## REATE 1

### FARETTO FISSO con 1 LED da 1 W

Corpo in alluminio.

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

#### Installazione

Tramite molle.

#### SPOTLIGHT with 1 LED 1 W

Alluminium cover.

Supply current: 350 mA constant.



Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

#### Installation

By springs.

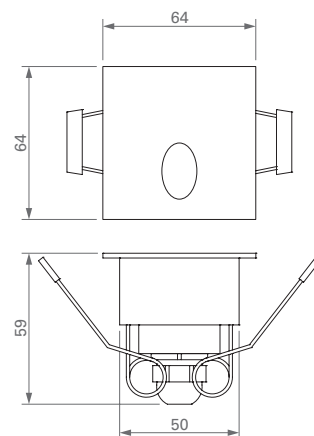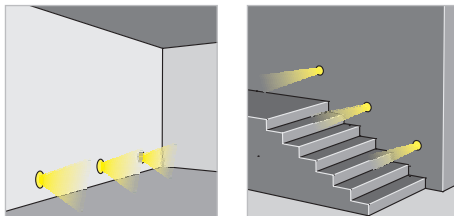

DIMENSIONI / DIMENSIONS

BI	CR	GR	FINITURA / FINISHING			
00	10	20	30	40	50	COLORE LED / LED COLOUR
02	05	FOCALE / BEAM SPREAD				

474-01-

CODICE / CODE



CE IP40

## REATE 2

### FARETTO FISSO con 1 LED da 1 W

Corpo in alluminio.

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

#### Installazione

Tramite cassaforma (inclusa).

#### SPOTLIGHT with 1 LED 1 W

Alluminium cover.

Supply current: 350 mA constant.



Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

#### Installation

By recessed connection box (included).

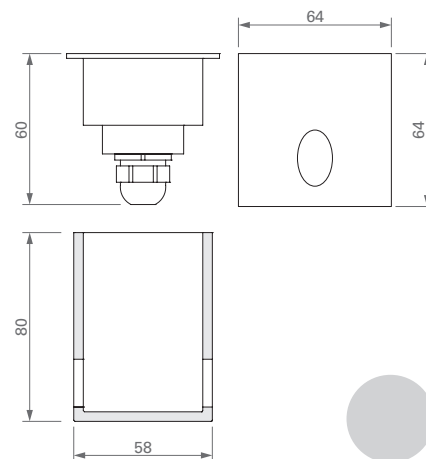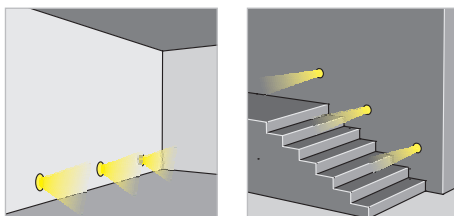

DIMENSIONI / DIMENSIONS

BI	CR	GR	FINITURA / FINISHING			
00	10	20	30	40	50	COLORE LED / LED COLOUR
02	05	FOCALE / BEAM SPREAD				

474-02-

CODICE / CODE



CE IP54