

MANTUA 1

**FARETTO FISSO A
DOPPIA EMISSIONE LUCE (ALTO/BASSO)
con 2 LED da 3 W**

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 6,4 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite viti.

*SPOTLIGHT FOR WALL WITH
DOUBLE LIGHT EMISSION (UP/DOWN)
with 2 LEDs 3 W*

Supply current: 700 mA constant.


Serial connection.

Consumption: 6.4 W.

Led power supply: code TRDC/700mA (pg. 187).

Installation


By screws.



AL	AO	CR	GR	FINITURA / FINISHING		
00	10	20	30	40	50	COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD						

511-01- 03

CODICE / CODE

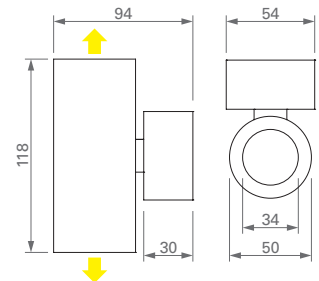

DIMENSIONI / DIMENSIONS

KELIS 1

**FARETTO FISSO A
DOPPIA EMISSIONE LUCE (ALTO/BASSO)
con 6 LED da 1 W**

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 8,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite viti.

*SPOTLIGHT FOR WALL WITH
DOUBLE LIGHT EMISSION (UP/DOWN)
with 6 LEDs 1 W*

Supply current: 350 mA constant.


Serial connection.

Consumption: 8.4 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation


By screws.



CR	GR	FINITURA / FINISHING				
00	10	20	30	40	50	COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD						

512-01- 07 09

CODICE / CODE

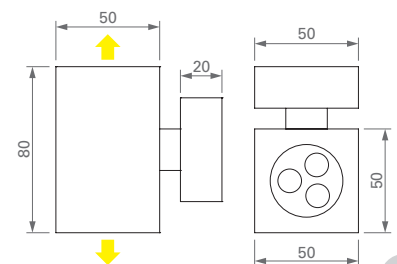

DIMENSIONI / DIMENSIONS