

SCETIS 1

FARETTO ORIENTABILE con 3 LED da 1 W

Alimentazione: in corrente continua 350 mA.


Collegamento in serie.

Consumo: 4,2 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite viti.



ADJUSTABLE SPOTLIGHT with 3 LEDs 1 W

Supply current: 350 mA constant.



Serial connection.

Consumption: 4.2 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation

By screws.

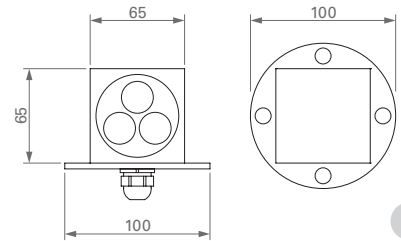

CR	GR	FINITURA / FINISHING				
00	10	20	30	40	50	COLORE LED / LED COLOUR
01	03	04	FOCALE / BEAM SPREAD			

515-01-

CODICE / CODE



DIMENSIONI / DIMENSIONS

SCETIS 2

FARETTO ORIENTABILE con 3 LED da 2 W

Alimentazione: in corrente continua 500 mA.



Collegamento in serie.

Consumo: 6 W.

Alimentatore consigliato: cod. TRDC/500mA (pg. 186).

Installazione

Tramite viti.

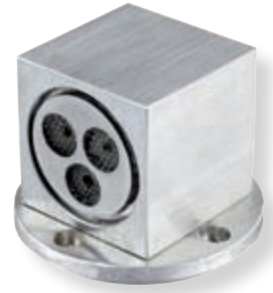

ADJUSTABLE SPOTLIGHT with 3 LEDs 2 W

Supply current: 500 mA constant.



Serial connection.

Consumption: 6 W.

Led power supply: code TRDC/500mA (pg. 186).

Installation

By screws.

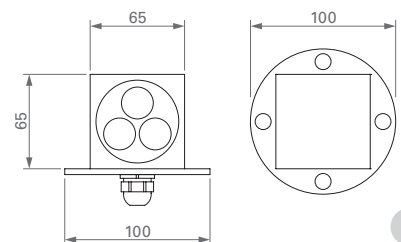

CR	GR	FINITURA / FINISHING				
00	10	20	30	40	50	COLORE LED / LED COLOUR
01	03	04	FOCALE / BEAM SPREAD			

515-02-

CODICE / CODE



DIMENSIONI / DIMENSIONS