

ODESSUS 1

FARETTO con 1 LED da 1 W Illuminazione laterale 1 lato

Corpo: acciaio inox AISI 316.

Vetro: satinato.

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite cassaforma (inclusa).

SPOTLIGHT with 1 LED 1 W

One side light emission

Body: stainless steel AISI 316.

Glass: frosted.

Supply current: 350 mA constant.





Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation

By recessed connection box (included).

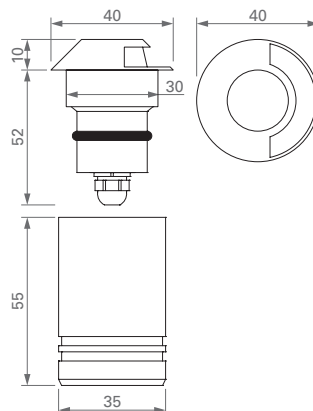

DIMENSIONI / DIMENSIONS


AL AO CR GR FINITURA / FINISHING

00 10 20 30 40 50 COLORE LED / LED COLOUR

FOCALE / BEAM SPREAD

318-01- 00

CODICE / CODE



ODESSUS 2

FARETTO con 1 LED da 1 W Illuminazione laterale 2 lati

Corpo: acciaio inox AISI 316.

Vetro: satinato.

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite cassaforma (inclusa).

SPOTLIGHT with 1 LED 1 W

Both sides light emission

Body: stainless steel AISI 316.

Glass: frosted.

Supply current: 350 mA constant.





Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation

By recessed connection box (included).

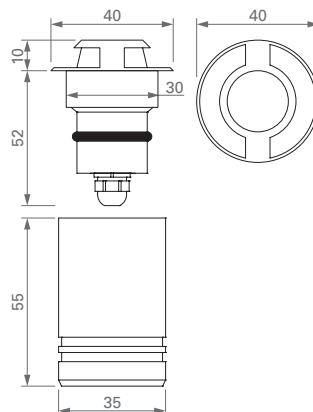

DIMENSIONI / DIMENSIONS

AL AO CR GR FINITURA / FINISHING

00 10 20 30 40 50 COLORE LED / LED COLOUR

FOCALE / BEAM SPREAD

318-02- 00

CODICE / CODE

