

CELEIA 1

FARETTO ORIENTABILE CON PICCHETTO con 1 LED da 3 W

Vetro: trasparente.

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 3,2 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite picchetto (incluso).

Versione con LED RGB

Su richiesta.

ADJUSTABLE SPOTLIGHT WITH STAKE with 1 LED 3 W

Glass: transparent.

Supply current: 700 mA constant.

Serial connection.

Consumption: 3.2 W.



Led power supply: code TRDC/700mA (pg. 187).

Installation

By stake (included).

LED RGB version

On request.

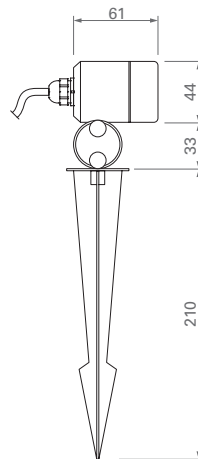

AO	CR	GR	FINITURA / FINISHING
00	10	COLORE LED / LED COLOUR	
01	03	04	FOCALE / BEAM SPREAD

319-01-

CODICE / CODE

DIMENSIONI / DIMENSIONS



CELEIA 2

FARETTO ORIENTABILE CON PICCHETTO con 3 LED da 3 W

Vetro: trasparente.

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 9,6 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite picchetto (incluso).

Versione con LED RGB

Su richiesta.

ADJUSTABLE SPOTLIGHT WITH STAKE with 3 LED 3 W

Glass: transparent.

Supply current: 700 mA constant.

Serial connection.

Consumption: 9.6 W.



Led power supply: code TRDC/700mA (pg. 187).

Installation

By stake (included).

LED RGB version

On request.

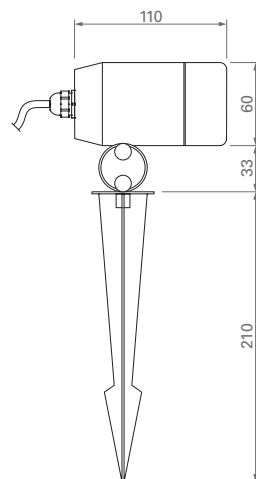

AO	CR	GR	FINITURA / FINISHING
00	10	COLORE LED / LED COLOUR	
01	03	04	FOCALE / BEAM SPREAD

319-02-

CODICE / CODE

DIMENSIONI / DIMENSIONS

