

GLEVUM 1

FARETTO ORIENTABILE con 1 LED da 3 W

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 3,2 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite molle.

ADJUSTABLE SPOTLIGHT with 1 LED 3 W

Supply current: 700 mA constant.



Serial connection.

Consumption: 3.2 W.

Led power supply: code TRDC/700mA (pg. 187).

Installation

By springs.

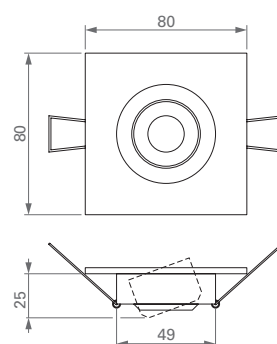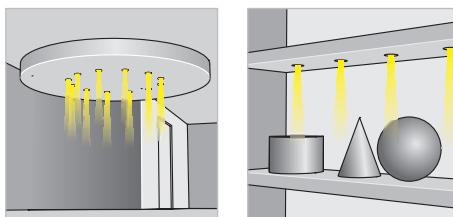

DIMENSIONI / DIMENSIONS

FINITURA / FINISHING
00 10 COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD
03

418-01- GR □ 03

CODICE / CODE



GLEVUM 2

FARETTO ORIENTABILE con 2 LED da 3 W

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 6,4 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite molle.

ADJUSTABLE SPOTLIGHT with 2 LED 3 W

Supply current: 700 mA constant.




Serial connection.

Consumption: 6.4 W.

Led power supply: code TRDC/700mA (pg. 187).

Installation

By springs.

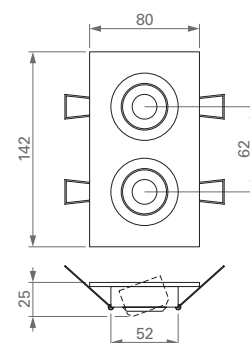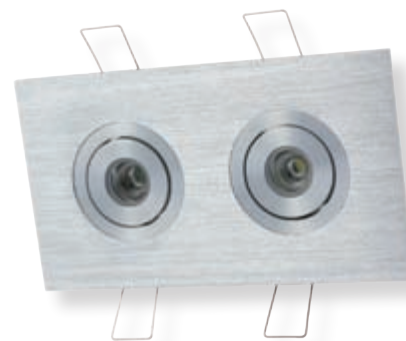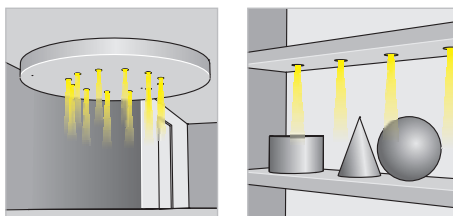

DIMENSIONI / DIMENSIONS

FINITURA / FINISHING
00 10 COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD
03

418-02- GR □ 03

CODICE / CODE

