

GLEVUM 3

FARETTO ORIENTABILE con 3 LED da 3 W

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 9,6 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite molle.

ADJUSTABLE SPOTLIGHT with 3 LED 3 W

Supply current: 700 mA constant.




Serial connection.

Consumption: 9.6 W.

Led power supply: code TRDC/700mA (pg. 187).

Installation

By springs.

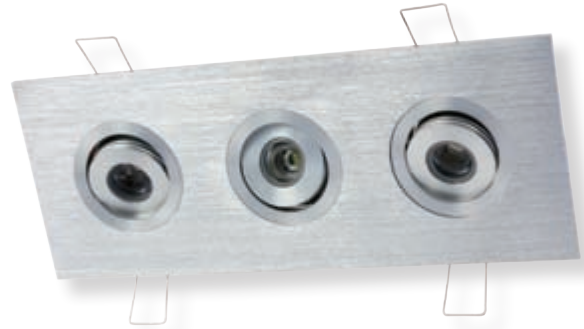


FINITURA / FINISHING
00 10 COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD
03

418-03- GR 03

CODICE / CODE



CE IP40 177x55

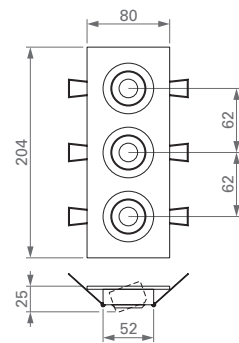

DIMENSIONI / DIMENSIONS

ARIEL 1

FARETTO CON OTTICA ORIENTABILE

con 1 LED da 3 W

Vetro: trasparente.

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 3,2 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione

Tramite viti.

Versione con LED RGB

Per versione con LED RGB vedi SISON 1 (pg. 123).

ADJUSTABLE SPOTLIGHT with 1 LED 3 W

Glass: transparent.

Supply current: 700 mA constant.

Serial connection.

Consumption: 3.2 W.



Led power supply: code TRDC/700mA (pg. 187).

Installation

By screws.

LED RGB version

For LED RGB version see SISON 1 (pg. 123)




FINITURA / FINISHING
00 10 COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD
06 08

419-01- AO 06 08

CODICE / CODE



CE IP67 Ø56

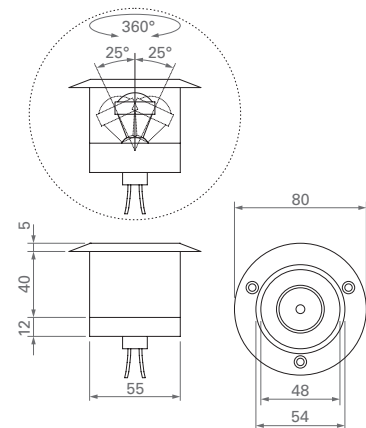

DIMENSIONI / DIMENSIONS