

# SELINUS 1

**FARETTO ORIENTABILE con 1 LED da 3 W**

Vetro: trasparente.

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 3,2 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

## Installazione

Tramite viti con staffa orientabile (inclusa).

Versione con LED RGB

Disponibile su richiesta.

*ADJUSTABLE SPOTLIGHT with 1 LED 3 W*

*Glass: transparent.*

*Supply current: 700 mA constant.*

*Serial connection.*

*Consumption: 3.2 W.*





*Led power supply: code TRDC/700mA (pg. 187).*

## Installation

*Adjustable support with screws included.*

*LED RGB version*

*Available on request.*

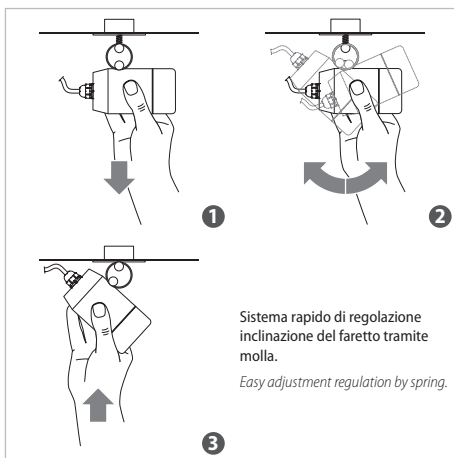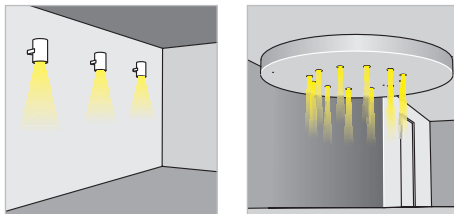

DIMENSIONI / DIMENSIONS

AO CR GR FINITURA / FINISHING  
00 10 COLORE LED / LED COLOUR  
01 03 04 FOCALITÀ / BEAM SPREAD

431-01-

CODICE / CODE



# SELINUS 2

**FARETTO ORIENTABILE con 3 LED da 3 W**

Vetro: trasparente.

Alimentazione: in corrente continua 700 mA.

Collegamento in serie.

Consumo: 9,6 W.

Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

## Installazione

Tramite viti con staffa orientabile (inclusa).

Versione con LED RGB

Disponibile su richiesta.

*ADJUSTABLE SPOTLIGHT with 3 LED 3 W*

*Glass: transparent.*

*Supply current: 700 mA constant.*

*Serial connection.*

*Consumption: 9.6 W.*





*Led power supply: code TRDC/700mA (pg. 187).*

## Installation

*Adjustable support with screws included.*

*LED RGB version*

*Available on request.*

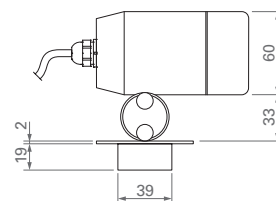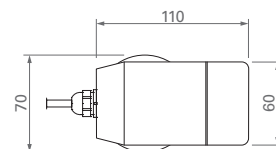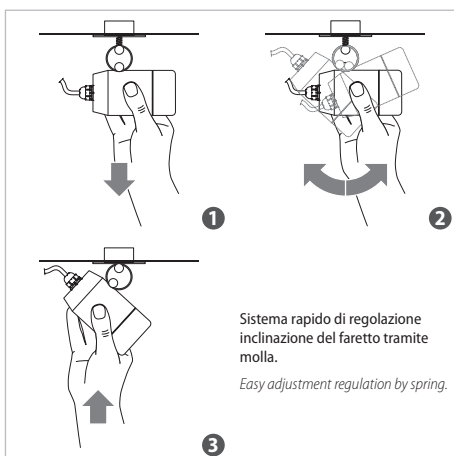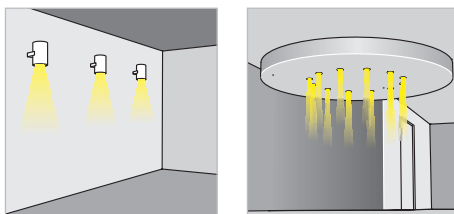

DIMENSIONI / DIMENSIONS

AO CR GR FINITURA / FINISHING  
00 10 COLORE LED / LED COLOUR  
01 03 04 FOCALITÀ / BEAM SPREAD

431-02-

CODICE / CODE

