

KONN 1

FARETTO FISSO DA INCASSO con 3 LED da 1 W

Corpo in alluminio.
Alimentazione: in corrente continua 350 mA.
Collegamento in serie.
Consumo: 4,5 W.
Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite molle.

Versione con LED RGB

Per versione con LED RGB vedi REND 1 (pg. 127).

SPOTLIGHT with 3 LEDs 1 W






Material: Aluminium.
Supply current: 350 mA constant.
Serial connection.
Consumption: 4.5 W.
Led power supply: code TRDC/350mA (pg. 185).

Installation

By springs.

LED RGB version

For LED RGB version see REND 1 (pg. 127)

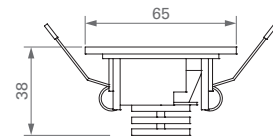

DIMENSIONI / DIMENSIONS

BI CR KS FINITURA / FINISHING
00 10 COLORE LED / LED COLOUR
07 09 FOCALE / BEAM SPREAD

434-01-

CODICE / CODE



CE IP20 ø62

THUM 1

FARETTO ORIENTABILE con 1 LED da 3 W

Corpo in alluminio.
Alimentazione: in corrente continua 700 mA.
Collegamento in serie.
Consumo: 3,2 W.
Alimentatore consigliato: cod. TRDC/700mA (pg. 187).

Installazione







Tramite molle.

ADJUSTABLE SPOTLIGHT with 1 LED 3 W

Material: Aluminium.
Supply current: 700 mA constant.
Serial connection.
Consumption: 3.2 W.
Led power supply: code TRDC/700mA (pg. 187).

Installation

By springs.

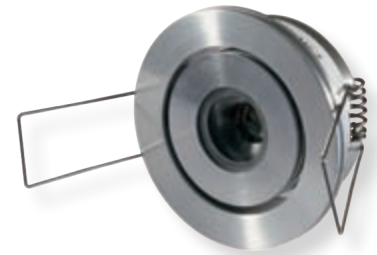

DIMENSIONI / DIMENSIONS

FINITURA / FINISHING
00 01 10 COLORE LED / LED COLOUR
FOCALE / BEAM SPREAD

488-01- GR 03

CODICE / CODE



CE IP40 ø48