

ARCIS 1

**FARETTO ORIENTABILE
CON GUAINA L=25 CM
con 1 LED da 1 W**

Alimentatore separato

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite viti.

*SPOTLIGHT WITH 25 CM FLEXIBLE TUBE LIGHT
with 1 LED 1 W*

Power supply not integrated

Supply current: 350 mA constant.





Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation

By screws.

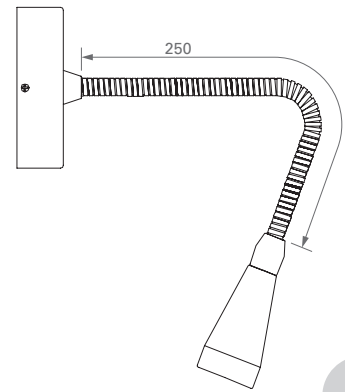

FINITURA / FINISHING

00 10 COLORE LED / LED COLOUR

06 08 FOCALE / BEAM SPREAD

477-01- CR

CODICE / CODE



CE



IP20

DIMENSIONI / DIMENSIONS

ARCIS 2

**FARETTO ORIENTABILE
CON GUAINA L=25 CM
con 1 LED da 1 W**

Alimentatore incorporato

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 1,4 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Tramite viti.

*SPOTLIGHT WITH 25 CM FLEXIBLE TUBE LIGHT
with 1 LED 1 W*

Integrated power supply

Supply current: 350 mA constant.





Serial connection.

Consumption: 1.4 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation

By screws.

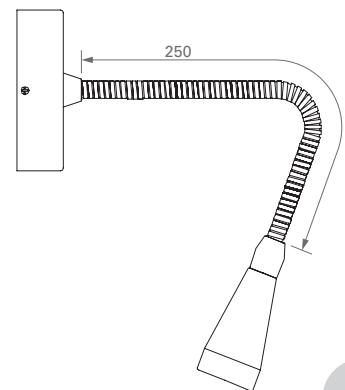

FINITURA / FINISHING

00 10 COLORE LED / LED COLOUR

06 08 FOCALE / BEAM SPREAD

477-02- CR

CODICE / CODE



CE



IP20

DIMENSIONI / DIMENSIONS