

BUGARACH 1

MINI FARETTO ORIENTABILE con 3 LED da 1 W

Alimentazione: in corrente continua 350 mA.

Collegamento in serie.

Consumo: 4,5 W.

Alimentatore consigliato: cod. TRDC/350mA (pg. 185).

Installazione

Fissaggio tramite dado sulla base dello stelo.

MINI ADJUSTABLE SPOTLIGHT with 3 LEDs 1 W

Supply current: 350 mA constant.



Serial connection.

Consumption: 4.5 W.

Led power supply: code TRDC/350mA (pg. 185).

Installation

Fixing by nut.

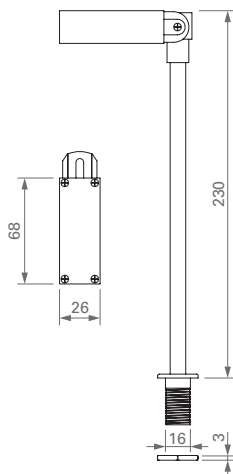

FINITURA / FINISHING
↓
00 10 COLORE LED / LED COLOUR
↓
FOCALE / BEAM SPREAD
↓
489-01- GR 00

CODICE / CODE

DIMENSIONI / DIMENSIONS



CE | | | | IP40 | | ø18

